


FITTING INSTRUCTIONS

10mm STAINLESS STEEL BAR STANDS

1. Fix the stainless steel bars to the base

- push the M6x20 bolt through an *appropriate hole in the base (from the bottom)
- screw into the threaded hole in the bottom of the bar
- Tighten using the larger allen key supplied

FIXING 10mm STAINLESS STEEL BAR TO BASE - SECTION THROUGH DISPLAY, SIDE-ON

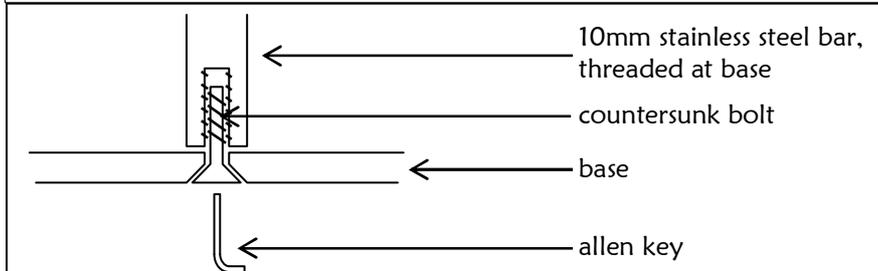

2. Stand display on base

3. Fix the clamps to the items to be supported (poster holders, panels, leaflet dispensers, panels etc)


- Ensure that grub screws in jaws of fittings are undone sufficiently to allow edge of item to be pushed fully into jaw of fitting.
- Position clamps at regular intervals on each item - place so that grub screws will be visible on the back of the item and are accessible for tightening. For leaflet dispenser panels, place clamps close to the top & bottom of the panels.
There will be 4 fittings per poster holder (except 2 per A5L), 4 per leaflet dispenser. Panels will have 2 - 6 clamps depending on size.
- Secure in position by tightening grub screws on to acrylic using smaller allen key supplied. Tighten sufficiently to grip securely but avoid over-tightening.

*HOLES IN BASES - WHICH TO USE

For accessories 234/246mm wide (eg A4P poster holders) use the innermost 2 holes on the 400x300mm base supplied.

For accessories 321/333mm wide (eg A3P poster holders) use the outermost 2 holes on the 400x300mm base supplied.

For accessories 444/456mm wide (eg A2P poster holders) use the only 2 holes in the 600x300mm base supplied.

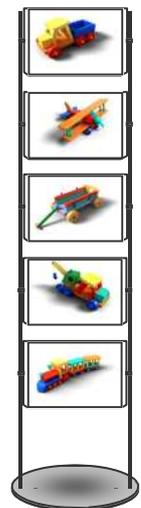

Fix accessories to stand

- Ensure that grub screws in fittings are undone sufficiently to allow them to slide easily on 10mm bars.
- Slide fittings attached to accessories on to 10mm bars as required, and position as desired.
- secure in position by tightening grub screws on to bars using smaller allen key supplied. Tighten sufficiently to grip securely.